



## APPLICATION INSTRUCTION

1. Gradually pull the handle, it will be more advantageous to protect the cartridge.
2. Pull the handle right is open, the angle you pull are more, the flow rate is becoming large, conversely the angle you pull are small, the flow rate is becoming little till close.
3. When pull the handle top, then turn left, the water outlet is hot water; gradually turn left, the flow rate is larger; turn right, the water outlet is cold water, gradually turn right, the flow rate is larger.

## DESCRIPTION


- Brass construction
- Flexible supply lines with 3/8" or 9/16" compression fittings
- Includes Red/Blue indicators
- Water usage is limited to these maximum flow rates as indicated by the corresponding product markings
- North America: 1.5 gpm max (5.7L/min) at 60psi
- California: 1.2 gpm max (4.5L/min) at 60psi
- Ceramic disk cartridge



**Website:** [www.rosanashop.com](http://www.rosanashop.com)  
**Contact:** [info@rosanashop.com](mailto:info@rosanashop.com)



## Basin Faucet Installation Instruction

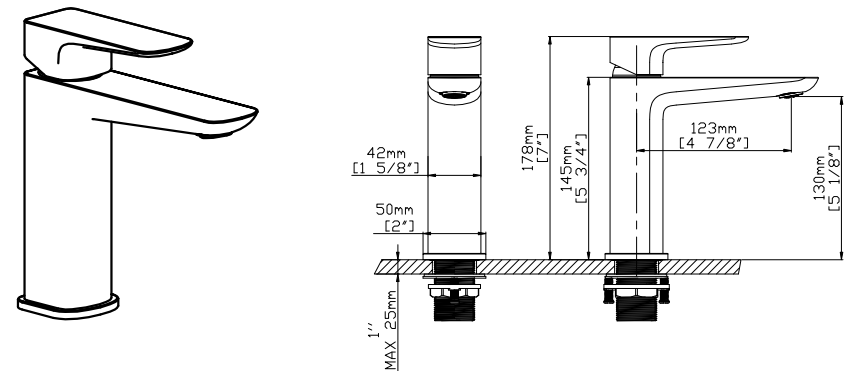


NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED  
THROUGH 1 HOLE,  $\Phi 1\text{-}3/8"$  ( $\Phi 35\text{mm}$ ) MIN.


- To insure proper installation, please read the following instructions carefully.
- Please make sure that the water supply has been shut off at the stop valve.




## TOOLS YOU WILL NEED



Adjustable wrench



Hexagon wrench



Philips Screwdriver







## NOTES BEFORE INSTALLATION

1. Please check that all components are present.
2. Before installation ensure that all feed lines are clear of debris and on/off valve is present.
3. Ensure water pressure is between 20-125 PSI (includes combination of hot and cold feed lines).
4. Pictures in the manual are general in content and may not represent exactly your purchased faucet. If you are having difficulties please contact a professional plumber.
5. If you will be away from home for an extended period you should shut off the main water supply.

## DAILY MAINTENANCE

1. Use a soft cloth and vinegar to remove hard-water spots.
2. Check aerator (if present) regularly for calcium build up or when water stream is not optimum.
3. DO NOT use caustic cleaning products as the use will breakdown finish and will void the product warranty.
4. Acceptable cleaners include vinegar or mild non-abrasive liquid detergents.
5. If the water pressure appears to be less than optimum remove, inspect, clean or replace aerator.

## INSTALLATION STEPS
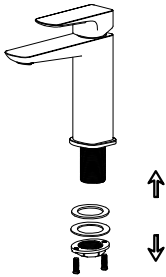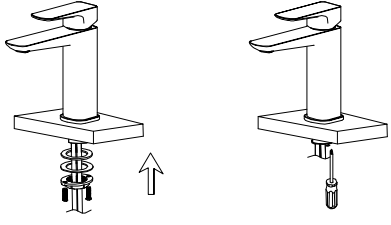
<p><b>1</b></p> 	<p><b>2</b></p> 
<p>1. Remove the rubber washer, metal washer and lock-nut from the faucet.</p>	<p>2. Screw on and hand tighten the hot and cold flexible hoses to the faucet. DO NOT use a wrench to tighten hoses as this may damage the hose and/or the hose threads.</p>
<p><b>3</b></p> 	<p><b>4</b></p> 
<p>3. Install faucet through center hole.</p>	<p>4. Re-install the rubber washer followed by the metal washer and lock-nut. Handtighten then tighten further using a screw driver to tighten lock-nut screws.</p>
<p><b>5</b></p> 	<p><b>6</b></p> 
<p>5. Attach flexible hose to water supply.</p>	<p>6. Remove the aerator and turn on faucet for 1-minute to flush debris from faucet and feed lines. Turn faucet off and re-install aerator.</p>